


DAKTRONICS BA-2515 PRODUCT SPECIFICATIONS

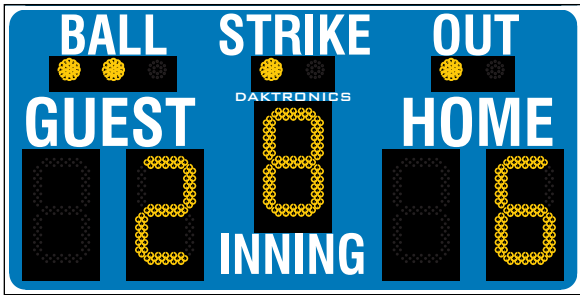

This outdoor LED baseball/softball scoreboard displays HOME and GUEST scores to 99, INNING to 9 and indicates BALL to three, STRIKE to two and OUT to two. Scoreboard shown with optional striping and amber PanaView® digits.

DIMENSIONS	UNCRATED WEIGHT	POWER (120 VAC)
3'-0" H x 6'-0" W x 8" D (914 mm, 1.83 m, 203 mm)	60 lb (27 kg)	150 Watts, 1.25 Amps

Note: Models with 240 VAC power at half the indicated amperage are also offered (International Use Only).

DIGITS & INDICATORS

- All digits are 15" (381 mm) high. All indicators are 2" (51 mm) in diameter.
- Select all red or all amber LED digits and indicators.
- Scoreboard features robust weather-sealed digits (see [DD2495646](#)).
- Digits may be dimmed for night viewing.

CAPTIONS

- HOME and GUEST captions are 6" (152 mm) high. All other captions are 5" (127 mm) high.
- Standard captions are vinyl, applied directly to the display face.

DISPLAY COLOR

Choose from 150+ colors (from Martin Senour® paint book) at no additional cost.

CONSTRUCTION

Alcoa aluminum alloy 5052 for excellent corrosion resistance

PRODUCT SAFETY APPROVAL

ETL listed to UL Standards 48 and 1433; tested to CSA standards and CE labeled for outdoor use

OPERATING TEMPERATURES

- Display: -22 to 122° Fahrenheit (-30 to 50° Celsius)
- Console: 32 to 130° Fahrenheit (0 to 54° Celsius)

DAKTRONICS BA-2515 PRODUCT SPECIFICATIONS

CONTROL CONSOLES	CONTROL OPTIONS
All Sport® 1600* (see SL-04352)	Wired (standard): One-pair shielded cable of 22 AWG minimum is required. A cover plate with mounted connector and standard 2" x 4" x 2" (51 mm x 102 mm x 51 mm) outlet box is provided. Connector mates with signal cable from control console.
<i>*May be upgraded to</i> All Sport 5000 (see SL-03991)	Wireless (optional): 2.4 GHz spread spectrum radio features 64 non-interfering channels and 8 broadcast groups (see SL-04370).
RC-100 (see SL-07397)	Optional wireless handheld controller features 900 MHz spread spectrum radio with 15 non-interfering channels and up to 10 hours of operation via internal rechargeable battery.

MOUNTING

Scoreboard is typically mounted on two vertical beams or poles. Hardware to mount scoreboard on two beams is included; hardware for more beams is at additional cost. Standard mounting uses I-beam clamps. Optional mounting method using angle brackets is also offered; maximum beam width is 10" (254 mm) and maximum beam depth is 13" (330 mm). Refer to attached drawings for more information on mounting methods.

SERVICE ACCESS

Digit panels and electronics are serviced from the front of the scoreboard.

GENERAL INFORMATION

Scoreboard provides scoring capabilities for two teams. 100% solid state electronics are housed in an all aluminum cabinet. Scoreboard is shipped in one section. Specifications and pricing are subject to change without notice.

OPTIONS & ACCESSORIES

- Scoreboard border striping
- Multiple caption and striping colors (see [DD2101644](#))
- Team name caption in place of HOME
- Individual digit protective screens (see [SL-04939](#))
- Protective netting
- Optional angle bracket mounting method
- Advertising/identification panels
- Decorative accents
- Electronic message centers and video displays in multiple sizes

ADVERTISING/IDENTIFICATION PANELS

Backlit & Non-Backlit Top/Bottom:

- 1'-6" H x 6'-0" W (457 mm, 1.83 m)
- 2'-0" H x 6'-0" W (610 mm, 1.83 m)
- 2'-6" H x 6'-0" W (762 mm, 1.83 m)


Non-Backlit Sides:

- 3'-0" H x 3'-0" W (914 mm, 914 mm)

For additional non-backlit panel sizes, see [SL-03761](#).

FOR ADDITIONAL INFORMATION

- Installation Specifications: DWG-222869 (attached)
 - One Ad Panel: DWG-222872 (attached)
 - Two Ad Panels: DWG-222875 (attached)
- Standard I-beam Mounting: DWG-1129110 (attached)
- Optional Pole Mounting: DWG-1130246 (attached)
- Component Locations: DWG-1125041 (attached)
- Architectural Specifications: See [DD1734698](#)
- Installation Manual: See [DD1755790](#)
- Service Manual: See [DD2124597](#)

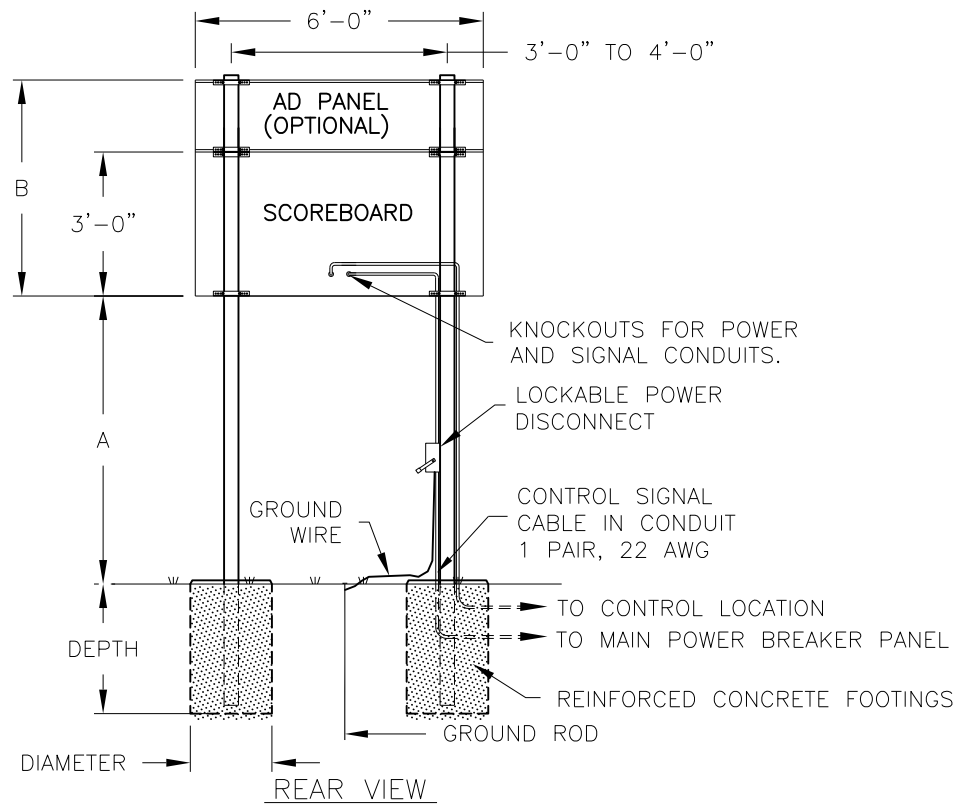

NOTES:

1. FOOTING AND COLUMN SIZES ARE SUGGESTIONS ONLY, PROVIDED TO ASSIST WITH ESTIMATING INSTALLATION COSTS AND ARE NOT INTENDED FOR CONSTRUCTION PURPOSES. THE DESIGN MUST BE CERTIFIED BY A PROFESSIONAL ENGINEER LICENSED IN THE STATE OF THE INSTALLATION BEFORE THEY CAN BE USED FOR FABRICATION OR ERECTION.

2. INTERNATIONAL BUILDING CODE 2006 USED IN DESIGN OF COLUMNS AND FOOTINGS WITH, IMPORTANCE FACTOR=1, $K_{zt}=1.0$, $K_d=0.85$, $G=0.85$. SEISMIC DESIGN WAS NOT CONSIDERED.

3. FOOTING DIMENSIONS ARE BASED ON ASSUMED SOIL CLASS 4 (ALLOWABLE LATERAL BEARING PRESSURE OF 150 psf).

4. STRUCTURAL STEEL IS GRADE A992 (50 ksi) STEEL. CONCRETE SHALL HAVE A MINIMUM 28 DAY COMPRESSIVE STRENGTH OF 2500 psi.

5. THE AVERAGE DISPLAY WEIGHT FOR A LAYOUT CAN NOT EXCEED 8 PSF.

6. DAKTRONICS INC. IS NOT RESPONSIBLE FOR STRUCTURES DESIGNED AND INSTALLED BY OTHERS.

7. REFER TO DAKTRONICS DRAWING 1407-E07B-299257 FOR DETAILS OF DISPLAY MOUNTING TO COLUMNS.

8. LOCAL BUILDING OFFICIALS SHOULD BE CONTACTED TO DETERMINE THE WIND SPEED AND EXPOSURE CATEGORY FOR THE PROPOSED SIGN LOCATION. THE EXPOSURE CATEGORIES B AND C ARE DEFINED AS:

EXPOSURE B – URBAN AND SUBURBAN AREAS, WOODED AREAS, OR OTHER TERRAIN WITH NUMEROUS CLOSELY SPACED OBSTRUCTIONS HAVING THE SIZE OF SINGLE-FAMILY DWELLINGS OR LARGER. THESE CONDITIONS MUST PREVAIL FOR A DISTANCE FROM THE SIGN OF AT LEAST 2,600 ft OR 20 TIMES THE SIGN HEIGHT, WHICHEVER IS GREATER

EXPOSURE C – OPEN TERRAIN WITH SCATTERED OBSTRUCTIONS HAVING HEIGHTS GENERALLY LESS THAN 30 FT. THIS CATEGORY INCLUDES FLAT OPEN COUNTRY, GRASSLANDS, AND ALL WATER SURFACES IN HURRICANE PRONE REGIONS.

9. FOR SPECIFIC PRODUCT DETAILS ON WEIGHT, MOUNTING, ETC. REFER TO THE INDIVIDUAL PRODUCT SPECIFICATION SHEETS.

EXPOSURE B

BA-2515						
HEIGHT ABOVE GRADE (A) (FT)	AD PANEL HEIGHT (FT)	COMBINED HEIGHT(B) (FT)		DESIGN WIND VELOCITY		
				90 MPH	110 MPH	130 MPH
10'	NONE	3'-0"	COLUMN	W6X9	W6X9	W6X9
			FOOTING	3'-0"X3'-6"	3'-0"X3'-6"	3'-0"X4'-0"
	2'-0"	5'-0"	COLUMN	W6X9	W6X12	W8X15
			FOOTING	3'-0"X4'-0"	3'-0"X4'-6"	3'-0"X5'-0"
15'	NONE	3'-0"	COLUMN	W8X10	W6X12	W8X15
			FOOTING	3'-0"X3'-6"	3'-0"X4'-0"	3'-0"X4'-6"
	2'-0"	5'-0"	COLUMN	W8X15	W8X18	W8X21
			FOOTING	3'-0"X4'-6"	3'-0"X5'-0"	3'-0"X5'-6"

EXPOSURE C

BA-2515						
HEIGHT ABOVE GRADE (A) (FT)	AD PANEL HEIGHT (FT)	COMBINED HEIGHT(B) (FT)		DESIGN WIND VELOCITY		
				90 MPH	110 MPH	130 MPH
10'	NONE	3'-0"	COLUMN	W6X9	W8X10	W6X12
			FOOTING	3'-0"X3'-6"	3'-0"X4'-0"	3'-0"X5'-0"
	2'-0"	5'-0"	COLUMN	W6X12	W8X15	W6X15
			FOOTING	3'-0"X4'-6"	3'-0"X5'-0"	3'-0"X6'-0"
15'	NONE	3'-0"	COLUMN	W6X12	W8X15	W6X15
			FOOTING	3'-0"X4'-0"	3'-0"X5'-0"	3'-0"X5'-6"
	2'-0"	5'-0"	COLUMN	W6X15	W8X21	W8X24
			FOOTING	3'-0"X5'-0"	3'-0"X6'-0"	3'-0"X6'-6"

FOOTING DIMENSIONS = DIAMETER X DEPTH

THE CONCEPTS EXPRESSED AND DETAILS SHOWN ON THIS DRAWING ARE CONFIDENTIAL AND PROPRIETARY. DO NOT REPRODUCE BY ANY MEANS, INCLUDING ELECTRONICALLY WITHOUT THE EXPRESSED WRITTEN CONSENT OF DAKTRONICS, INC. COPYRIGHT 2004 DAKTRONICS, INC.

DAKTRONICS, INC. BROOKINGS, SD 57006


PROJ: OUTDOOR LED SCOREBOARDS

TITLE: INSTALLATION SPECS: 3'X6' MODELS

DES. BY: MCOPL/RNEYEN DRAWN BY: MCOPLAN DATE: 07SEP04

REVISION 02 APPR. BY: SCALE: 1=80 1192-R10A-222869

02	21 JAN 10	REMOVED "DISTAVIEW" FROM TITLE BLOCK. REMOVED "31" FROM BA-2515 IN EXPOSURE B & C TABLES.	JTL	
01	8/6/09	UPDATED CHARTS UPDATED NOTES	MS	
REV.	DATE	DESCRIPTION	BY	APPR.

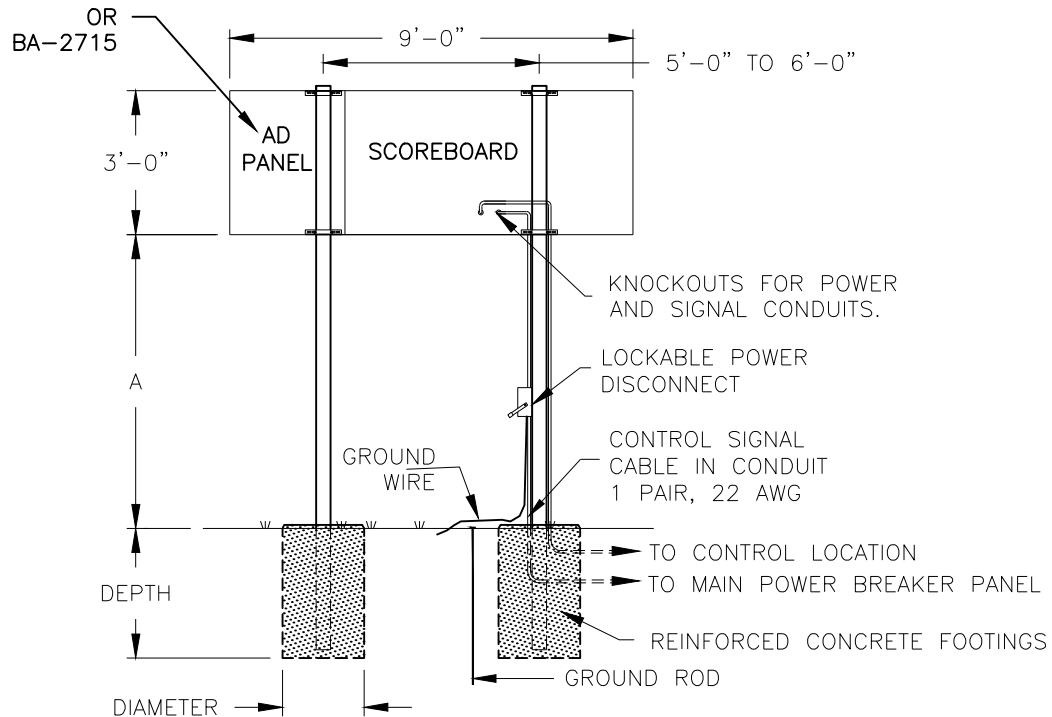

NOTES:

1. FOOTING AND COLUMN SIZES ARE SUGGESTIONS ONLY, PROVIDED TO ASSIST WITH ESTIMATING INSTALLATION COSTS AND ARE NOT INTENDED FOR CONSTRUCTION PURPOSES. THE DESIGN MUST BE CERTIFIED BY A PROFESSIONAL ENGINEER LICENSED IN THE STATE OF THE INSTALLATION BEFORE THEY CAN BE USED FOR FABRICATION OR ERECTION.

REAR VIEW

2. INTERNATIONAL BUILDING CODE 2006 USED IN DESIGN OF COLUMNS AND FOOTINGS WITH, IMPORTANCE FACTOR=1, $K_{zt}=1.0$, $K_d=0.85$, $G=0.85$. SEISMIC DESIGN WAS NOT CONSIDERED.

3. FOOTING DIMENSIONS ARE BASED ON ASSUMED SOIL CLASS 4 (ALLOWABLE LATERAL BEARING PRESSURE OF 150 psf).

4. STRUCTURAL STEEL IS GRADE A992 (50 ksi) STEEL. CONCRETE SHALL HAVE A MINIMUM 28 DAY COMPRESSIVE STRENGTH OF 2500 psi.

5. THE AVERAGE DISPLAY WEIGHT FOR A LAYOUT CAN NOT EXCEED 8 PSF.

6. DAKTRONICS INC. IS NOT RESPONSIBLE FOR STRUCTURES DESIGNED AND INSTALLED BY OTHERS.

7. REFER TO DAKTRONICS DRAWING 1407-E07B-299257 FOR DETAILS OF DISPLAY MOUNTING TO COLUMNS.

8. LOCAL BUILDING OFFICIALS SHOULD BE CONTACTED TO DETERMINE THE WIND SPEED AND EXPOSURE CATEGORY FOR THE PROPOSED SIGN LOCATION. THE EXPOSURE CATEGORIES B AND C ARE DEFINED AS:

EXPOSURE B – URBAN AND SUBURBAN AREAS, WOODED AREAS, OR OTHER TERRAIN WITH NUMEROUS CLOSELY SPACED OBSTRUCTIONS HAVING THE SIZE OF SINGLE-FAMILY DWELLINGS OR LARGER. THESE CONDITIONS MUST PREVAIL FOR A DISTANCE FROM THE SIGN OF AT LEAST 2,600 ft OR 20 TIMES THE SIGN HEIGHT, WHICHEVER IS GREATER

EXPOSURE C – OPEN TERRAIN WITH SCATTERED OBSTRUCTIONS HAVING HEIGHTS GENERALLY LESS THAN 30 FT. THIS CATEGORY INCLUDES FLAT OPEN COUNTRY, GRASSLANDS, AND ALL WATER SURFACES IN HURRICANE PRONE REGIONS.

9. FOR SPECIFIC PRODUCT DETAILS ON WEIGHT, MOUNTING, ETC. REFER TO THE INDIVIDUAL PRODUCT SPECIFICATION SHEETS.

EXPOSURE B

BA-2515, BA-2715					
HEIGHT ABOVE GRADE (A) (FT)	DISPLAY HEIGHT (FT)		DESIGN WIND VELOCITY		
			90 MPH	110 MPH	130 MPH
10'	3'-0"	COLUMN	W6X9	W8X10	W6X12
		FOOTING	3'-0"X4'-0"	3'-0"X4'-6"	3'-0"X5'-0"
15'	3'-0"	COLUMN	W6X12	W6X15	W6X15
		FOOTING	3'-0"X4'-0"	3'-0"X5'-0"	3'-0"X5'-6"


EXPOSURE C

BA-2515, BA-2715					
HEIGHT ABOVE GRADE (A) (FT)	DISPLAY HEIGHT (FT)		DESIGN WIND VELOCITY		
			90 MPH	110 MPH	130 MPH
10'	3'-0"	COLUMN	W8X10	W6X12	W8X15
		FOOTING	3'-0"X4'-6"	3'-0"X5'-0"	3'-0"X5'-6"
15'	3'-0"	COLUMN	W6X15	W6X15	W8X21
		FOOTING	3'-0"X5'-0"	3'-0"X5'-6"	3'-0"X6'-0"

FOOTING DIMENSIONS = DIAMETER X DEPTH

 DAKTRONICS, INC. BROOKINGS, SD 57006 DO NOT SCALE DRAWING	THE CONCEPTS EXPRESSED AND DETAILS SHOWN ON THIS DRAWING ARE CONFIDENTIAL AND PROPRIETARY. DO NOT REPRODUCE BY ANY MEANS WITHOUT THE EXPRESSED WRITTEN CONSENT OF DAKTRONICS, INC. COPYRIGHT 2010 DAKTRONICS, INC.		
	PROJ: OUTDOOR LED SCOREBOARDS TITLE: INSTALLATION SPECS: 3'X6' MODELS- 1 AD, 3'X9' DESIGN: MCOPL/RNEYEN DRAWN: MCOPLAN DATE: 07SEP04 SCALE: 1=80		
SHEET 03	REV 03	JOB NO: P1192	FUNC-TYPE-SIZE R-10-A
			222872

REV 03	DATE: 02 NOV 10	ADDED BA-2715 OPTION	BY: BDS
REV 02	DATE: 21 JAN 10	REMOVED "DISTAVIEW" FROM TITLE BLOCK. REMOVED "-31" FROM BA-2515 IN EXPOSURE B & C TABLES.	BY: JTL
REV 01	DATE: 8/6/09	UPDATED COLUMN SPACING UPDATED CHARTS UPDATED NOTES	BY: MS

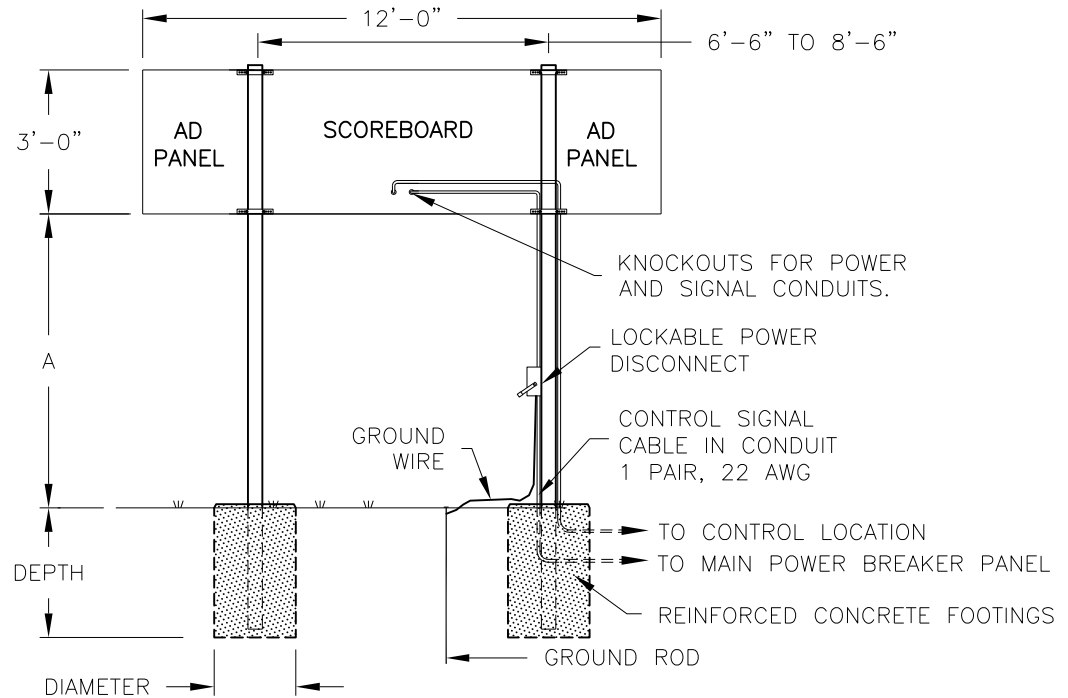

REAR VIEW

NOTES:

1. FOOTING AND COLUMN SIZES ARE SUGGESTIONS ONLY, PROVIDED TO ASSIST WITH ESTIMATING INSTALLATION COSTS AND ARE NOT INTENDED FOR CONSTRUCTION PURPOSES. THE DESIGN MUST BE CERTIFIED BY A PROFESSIONAL ENGINEER LICENSED IN THE STATE OF THE INSTALLATION BEFORE THEY CAN BE USED FOR FABRICATION OR ERECTION.

2. INTERNATIONAL BUILDING CODE 2006 USED IN DESIGN OF COLUMNS AND FOOTINGS WITH, IMPORTANCE FACTOR=1, $K_{zt}=1.0$, $K_d=0.85$, $G=0.85$. SEISMIC DESIGN WAS NOT CONSIDERED.

3. FOOTING DIMENSIONS ARE BASED ON ASSUMED SOIL CLASS 4 (ALLOWABLE LATERAL BEARING PRESSURE OF 150 psf).

4. STRUCTURAL STEEL IS GRADE A992 (50 ksi) STEEL. CONCRETE SHALL HAVE A MINIMUM 28 DAY COMPRESSIVE STRENGTH OF 2500 psi.

5. THE AVERAGE DISPLAY WEIGHT FOR A LAYOUT CAN NOT EXCEED 8 PSF.

6. DAKTRONICS INC. IS NOT RESPONSIBLE FOR STRUCTURES DESIGNED AND INSTALLED BY OTHERS.

7. REFER TO DAKTRONICS DRAWING 1407-E07B-299257 FOR DETAILS OF DISPLAY MOUNTING TO COLUMNS.

8. LOCAL BUILDING OFFICIALS SHOULD BE CONTACTED TO DETERMINE THE WIND SPEED AND EXPOSURE CATEGORY FOR THE PROPOSED SIGN LOCATION. THE EXPOSURE CATEGORIES B AND C ARE DEFINED AS:

EXPOSURE B – URBAN AND SUBURBAN AREAS, WOODED AREAS, OR OTHER TERRAIN WITH NUMEROUS CLOSELY SPACED OBSTRUCTIONS HAVING THE SIZE OF SINGLE-FAMILY DWELLINGS OR LARGER. THESE CONDITIONS MUST PREVAIL FOR A DISTANCE FROM THE SIGN OF AT LEAST 2,600 ft OR 20 TIMES THE SIGN HEIGHT, WHICHEVER IS GREATER

EXPOSURE C – OPEN TERRAIN WITH SCATTERED OBSTRUCTIONS HAVING HEIGHTS GENERALLY LESS THAN 30 FT. THIS CATEGORY INCLUDES FLAT OPEN COUNTRY, GRASSLANDS, AND ALL WATER SURFACES IN HURRICANE PRONE REGIONS.

9. FOR SPECIFIC PRODUCT DETAILS ON WEIGHT, MOUNTING, ETC. REFER TO THE INDIVIDUAL PRODUCT SPECIFICATION SHEETS.

EXPOSURE B

BA-2515					
HEIGHT ABOVE GRADE (A) (FT)	DISPLAY HEIGHT (FT)		DESIGN WIND VELOCITY		
			90 MPH	110 MPH	130 MPH
10'	3'-0"	COLUMN	W6X9	W6X12	W10X15
		FOOTING	3'-0"X4'-0"	3'-0"X5'-0"	3'-0"X5'-6"
15'	3'-0"	COLUMN	W6X15	W6X15	W8X21
		FOOTING	3'-0"X4'-6"	3'-0"X5'-6"	3'-0"X6'-0"

EXPOSURE C



BA-2515				
HEIGHT ABOVE GRADE (A) (FT)	DISPLAY HEIGHT (FT)		DESIGN WIND VELOCITY	
			90 MPH	110 MPH
10'	3'-0"	COLUMN	W8X13	W10X15
		FOOTING	3'-0"X4'-6"	3'-0"X5'-6"
15'	3'-0"	COLUMN	W6X15	W8X21
		FOOTING	3'-0"X5'-6"	3'-0"X6'-0"

FOOTING DIMENSIONS = DIAMETER X DEPTH



02	21 JAN 10	REMOVED "DISTAVIEW" FROM TITLE BLOCK. REMOVED "31" FROM BA-2515 IN EXPOSURE B & C TABLES.	JTL	
01	8/7/09	UPDATED COLUMN SPACING UPDATED TABLES UPDATED NOTES	MS	
REV.	DATE	DESCRIPTION	BY	APPR.

THE CONCEPTS EXPRESSED AND DETAILS SHOWN ON THIS DRAWING ARE CONFIDENTIAL AND PROPRIETARY. DO NOT REPRODUCE BY ANY MEANS, INCLUDING ELECTRONICALLY WITHOUT THE EXPRESSED WRITTEN CONSENT OF DAKTRONICS, INC. COPYRIGHT 2004 DAKTRONICS, INC.			
DAKTRONICS, INC. BROOKINGS, SD 57006			
PROJ: OUTDOOR LED SCOREBOARDS			
TITLE: INSTALLATION SPECS: 3'X6' MODELS- 2 ADS			
DES. BY: MCOPL/RNEYEN		DRAWN BY: MCOPLAN	
		DATE: 07SEP04	
REVISION	APPR. BY:	1192-R10A-222875	
02	SCALE: 1=80		

STANDARD SHEETMETAL SCOREBOARD/BACKLIT
AD PANEL MOUNTING METHOD

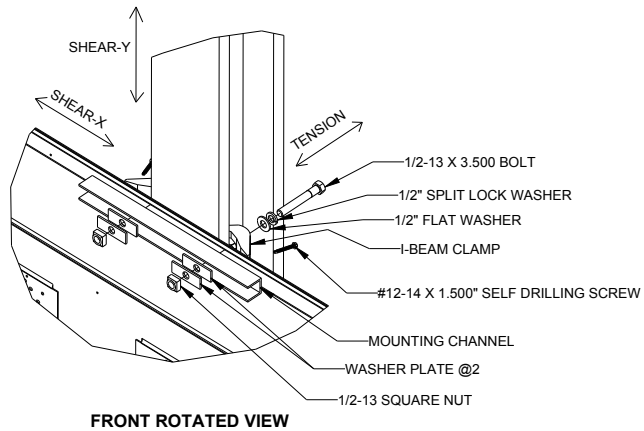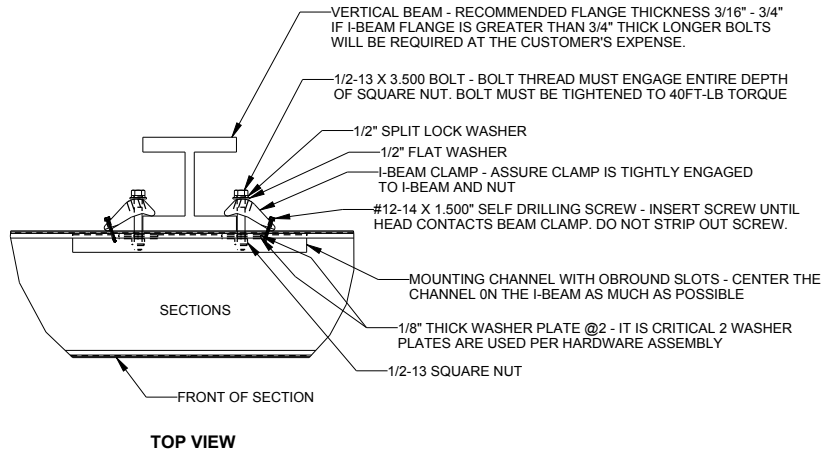

STANDARD NON-BACKLIT AD PANEL MOUNTING METHOD

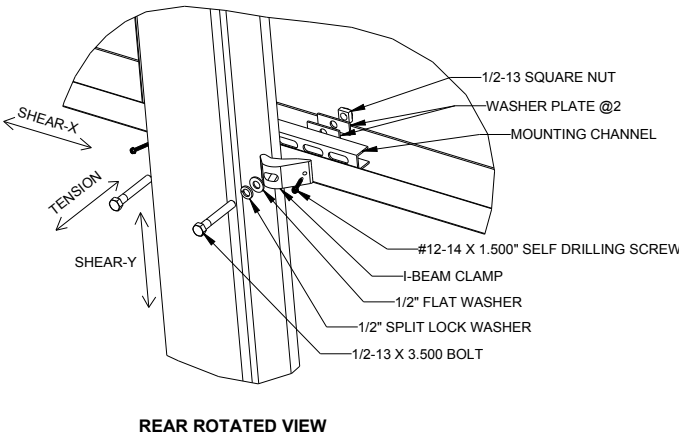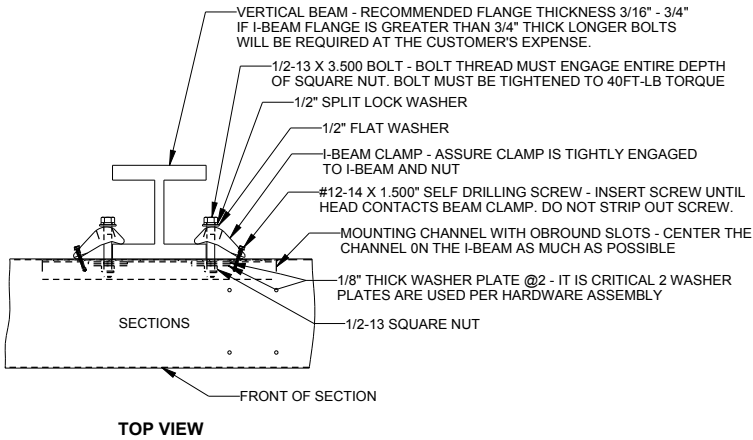

**QUALIFIED FOR SECTIONS UP TO 5' IN HEIGHT
USING RECOMMENDED STRUCTURE**

ALLOWABLE CAPACITY PER EACH CLAMP:
SHEAR = 160 LBS
TENSION = 1700 LBS


SHEAR AND TENSION LOAD
DIRECTION ARE AS INDICATED ON
ROTATED VIEWS

MOUNTING INSTRUCTIONS:

1. LIFT THE FIRST SECTION OF THE DISPLAY INTO POSITION
AGAINST I-BEAMS.
NOTE: IF THE DISPLAY IS MADE UP OF MULTIPLE SECTIONS
ALWAYS INSTALL THE BOTTOM SECTION FIRST AND WORK UP.
2. STARTING ON THE TOP OF THE SECTION BEING INSTALLED
MARK AND DRILL 9/16" HOLES IN THE CENTER OF THE TOP
FLANGE OF THE SECTION. MAKE SURE THE HOLES ARE
POSITIONED AS CLOSE TO THE I-BEAM FLANGES AS POSSIBLE.
3. INSTALL ALL THE HARDWARE SHOWN PROVIDED AND TIGHTEN
THE SECTION IN THE DESIRED LOCATION.
4. ONCE THE TOP OF THE SECTION IS SECURE MOVE TO THE
BOTTOM OF THE SECTION AND REPEAT THE STEPS ABOVE.
5. IF THE DISPLAY IS MADE OF MULTIPLE SECTIONS REPEAT
THE ENTIRE PROCEDURE ABOVE.
6. ENSURE ALL 1/2" HARDWARE IS TORQUED TO THE SPECIFIED
AMOUNT.

 DAKTRONICS, INC. BROOKINGS, SD 57006 DO NOT SCALE DRAWING		THE CONCEPTS EXPRESSED AND DETAILS SHOWN ON THIS DRAWING ARE CONFIDENTIAL AND PROPRIETARY. DO NOT REPRODUCE BY ANY MEANS WITHOUT THE EXPRESS WRITTEN CONSENT OF DAKTRONICS, INC. COPYRIGHT 2014 DAKTRONICS, INC.	
PROJ: OUTDOOR SCOREBOARD			
TITLE: I-BEAM CLAMP MOUNTING, SHEET METAL ATTACHMENT			
DESIGN: KSCHNABEL		DRAWN: KSCHNABEL	DATE: 06-JAN-14
SCALE: 1/8"			
SHEET: 1 OF 1	REV 01	JOB NO: P 1753	FUNC-TYPE-SIZE E - 10 - B
			1129110

1129110

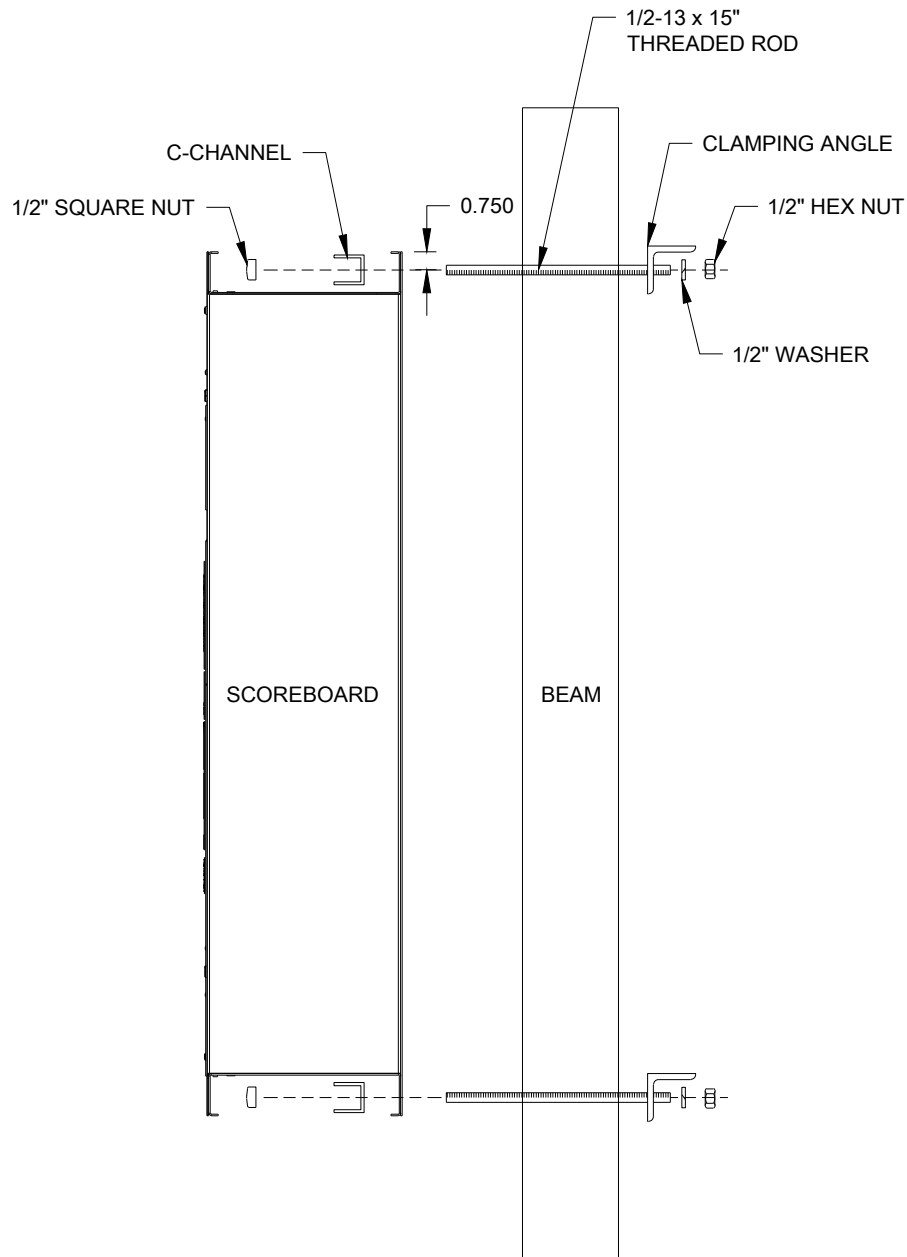


MOUNTING INSTRUCTIONS:

1. USE THE MOUNTING CHANNEL TO DETERMINE WHICH HOLE COMBINATION SHOULD BE USED. BE SURE TO KEEP THE BOLT AS CLOSE TO THE BEAM AS POSSIBLE.
2. USING THE MOUNTING CHANNEL AS A TEMPLATE, DRILL 9/16" HOLES IN THE UPPER AND LOWER REAR FLANGE OF SCOREBOARDS WHERE THE SUPPORTS WILL GO.
3. PLACE SQUARE NUTS INSIDE CHANNEL AND THREAD BOLTS THROUGH.
4. LIFT SCOREBOARD INTO POSITION WITH BOLTS STILL IN PLACE.
5. PLACE MOUNTING ANGLES OVER EACH PAIR OF BOLTS AND SECURE WITH LOCK WASHERS AND HEX NUTS.
6. WHEN SCOREBOARD IS ADJUSTED TO FINAL DESIRED POSITION, TIGHTEN HEX NUTS FIRMLY.


 DAKTRONICS, INC. BROOKINGS, SD 57006 DO NOT SCALE DRAWING		THE CONCEPTS EXPRESSED AND DETAILS SHOWN ON THIS DRAWING ARE CONFIDENTIAL AND PROPRIETARY. DO NOT REPRODUCE BY ANY MEANS WITHOUT THE EXPRESSED WRITTEN CONSENT OF DAKTRONICS, INC. COPYRIGHT 2013 DAKTRONICS, INC.	
PROJ: OUTDOOR SHEET METAL SCOREBOARDS			
TITLE: SCOREBOARD MOUNTING			
DESIGN: KDRAGT		DRAWN: KDRAGT	
SCALE: 1=8		DATE: 14 MAR 13	
SHEET	REV	JOB NO:	FUNC - TYPE - SIZE
	00	P1753	E - 10 - A
			1130246

BA-2515-R/A/W

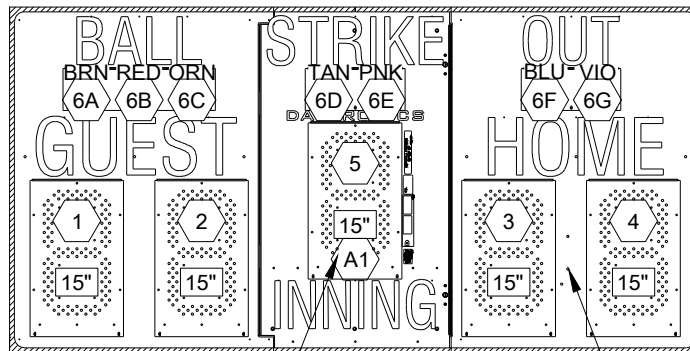

SEE DETAIL A OR DETAIL B(MASTER DRIVER)
DOOR TO ACCESS
KNOCKOUTS PROVIDED


FRONT VIEW



ENCLOSED 16 COLUMN MASTER LED DRIVER
AND POWER/SIGNAL ENCLOSURE @1 (THE
COVER HAS BEEN REMOVED TO SHOW THE
ENCLOSURE COMPONENT DETAIL)

DETAIL: A

WHITE-120V
RED OR AMBER OR WHITE
-240V DISPLAYS



ENCLOSED 8 COLUMN MASTER LED DRIVER
AND POWER/SIGNAL ENCLOSURE @1 (THE
COVER HAS BEEN REMOVED TO SHOW THE
ENCLOSURE COMPONENT DETAIL)

DETAIL: A

RED OR AMBER-120V DISPLAYS

3 = DRIVER CONNECTOR
WIRED TO THAT DIGIT

18" = DIGIT SIZE

6B = DRIVER CONNECTOR
AND SEGMENT (PIN) #
WIRED TO THAT INDICATOR

A1 = DRIVER NUMBER

 DAKTRONICS, INC. BROOKINGS, SD 57006		THE CONCEPTS EXPRESSED AND DETAILS SHOWN ON THIS DRAWING ARE CONFIDENTIAL AND PROPRIETARY. DO NOT REPRODUCE BY ANY MEANS WITHOUT THE EXPRESSED WRITTEN CONSENT OF DAKTRONICS, INC. COPYRIGHT 2013 DAKTRONICS, INC.	
		DO NOT SCALE DRAWING	
PROJ: OUTDOOR SHEETMETAL SCOREBOARDS			
TITLE: COMPONENT LOCATION; BA-2515-R/A/W-PV-120/240- F			
DESIGN: KDRAGT		DRAWN: KDRAGT	
SCALE: 1=20		DATE: 16 JAN 13	
SHEET	REV	JOB NO:	FUNC - TYPE-SIZE
00	P 1753	E - 10 - A	1125041